

FIG. 1

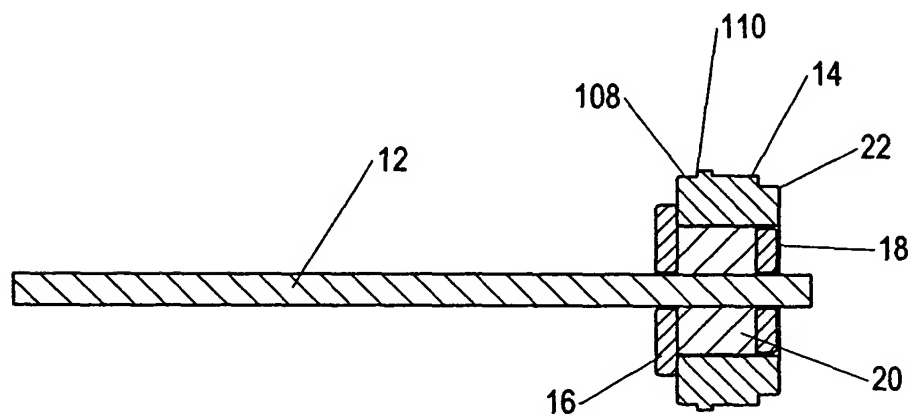


FIG. 2

2/11

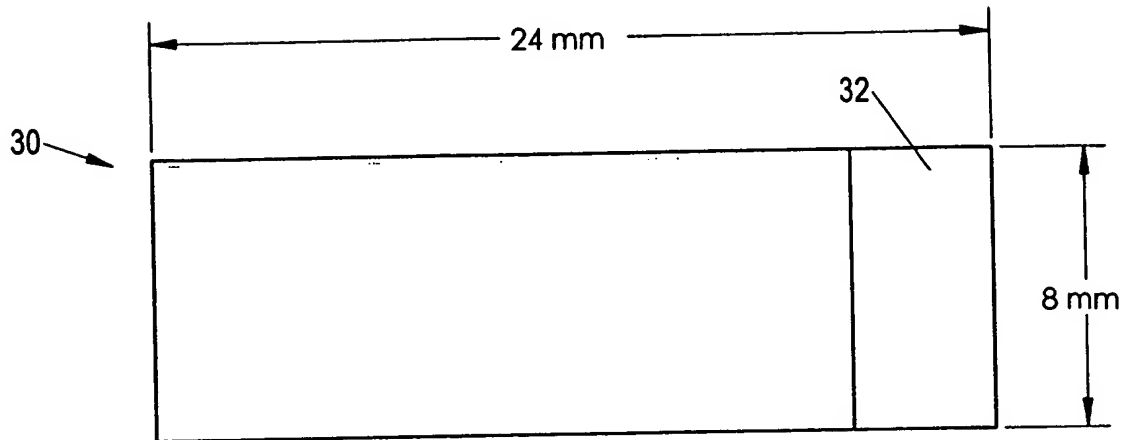


FIG. 3

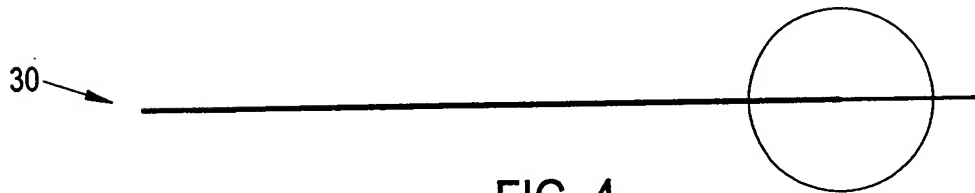


FIG. 4




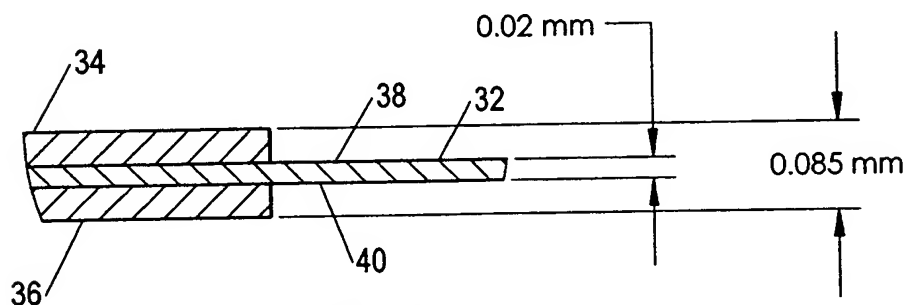


FIG. 5

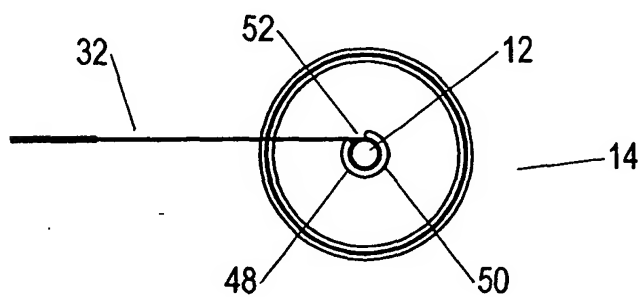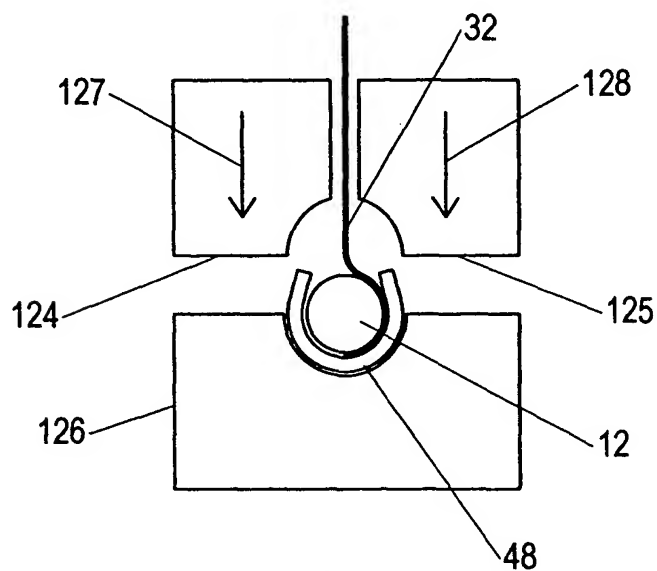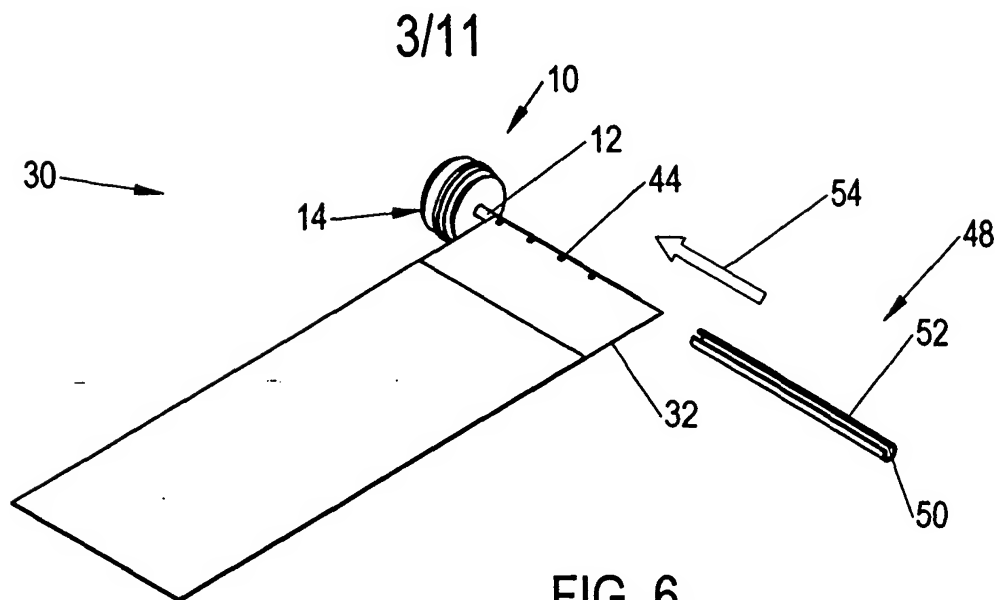

4/11

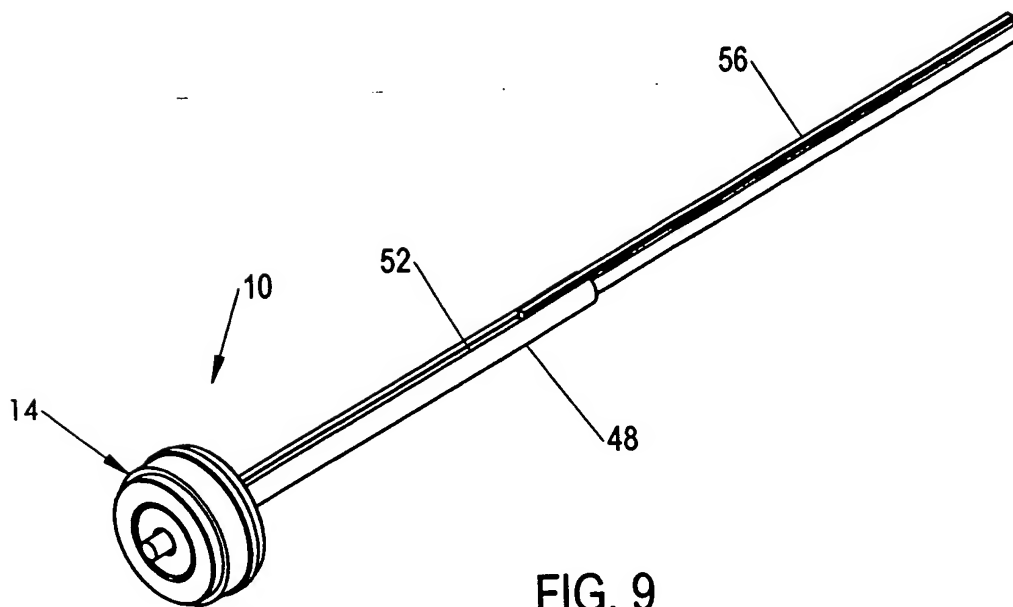


FIG. 9

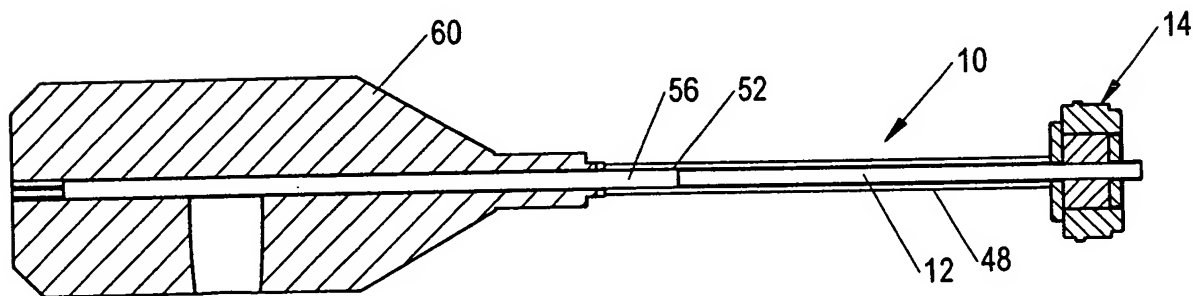


FIG. 10

5/11

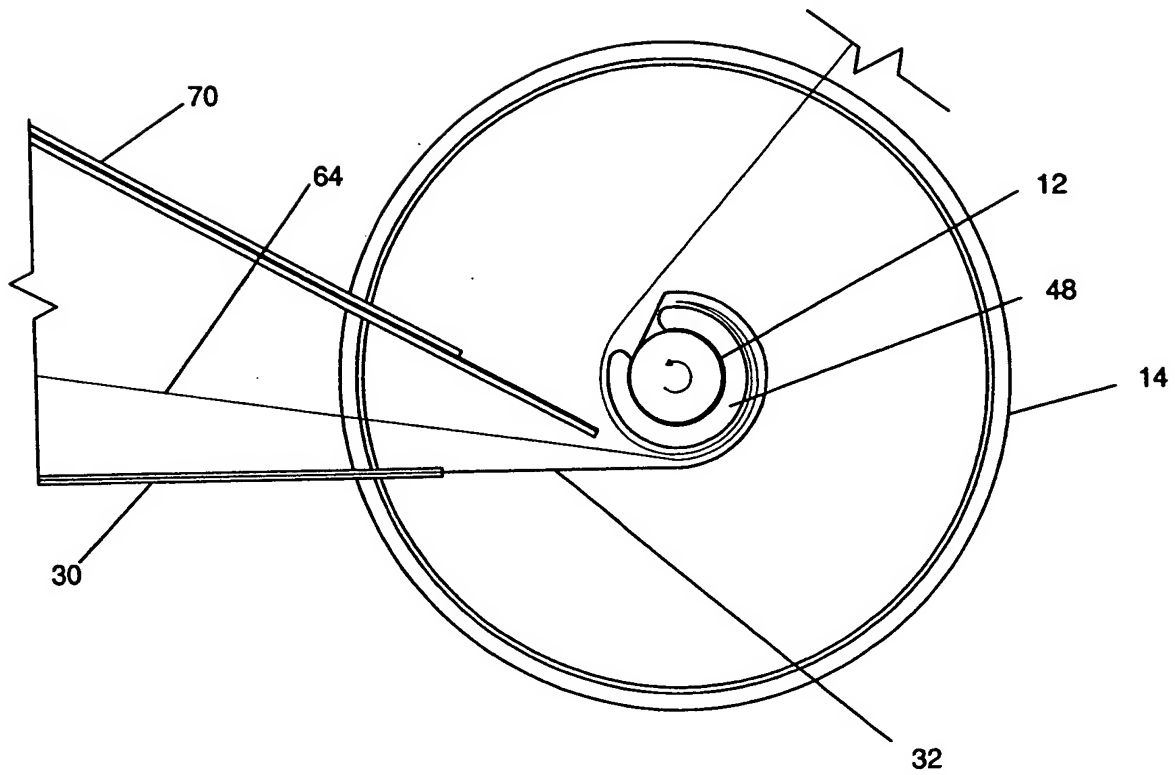


FIG. 11

6/11

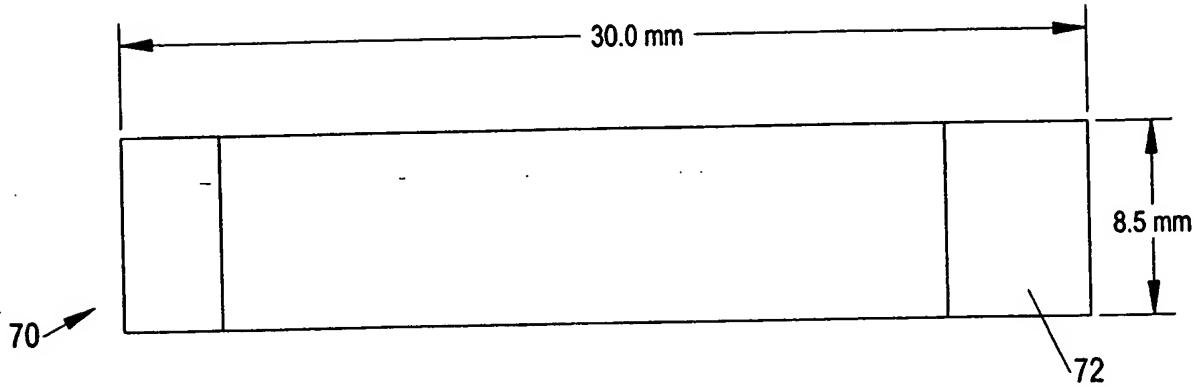


FIG. 12

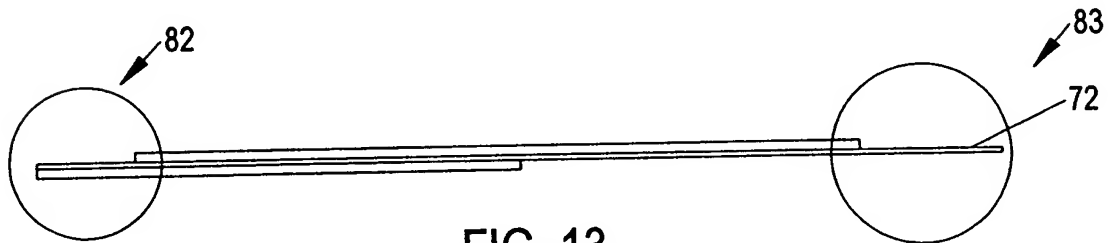


FIG. 13

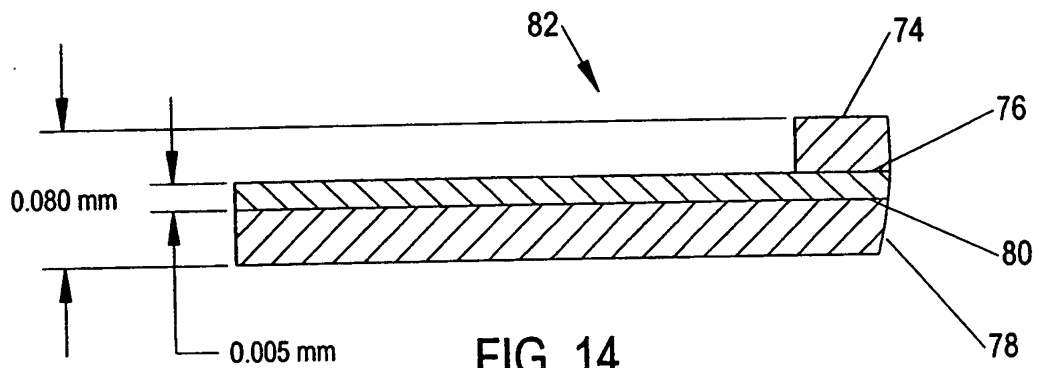


FIG. 14

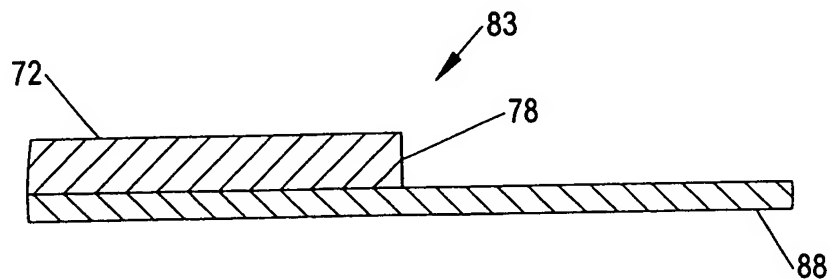


FIG. 15

7/11



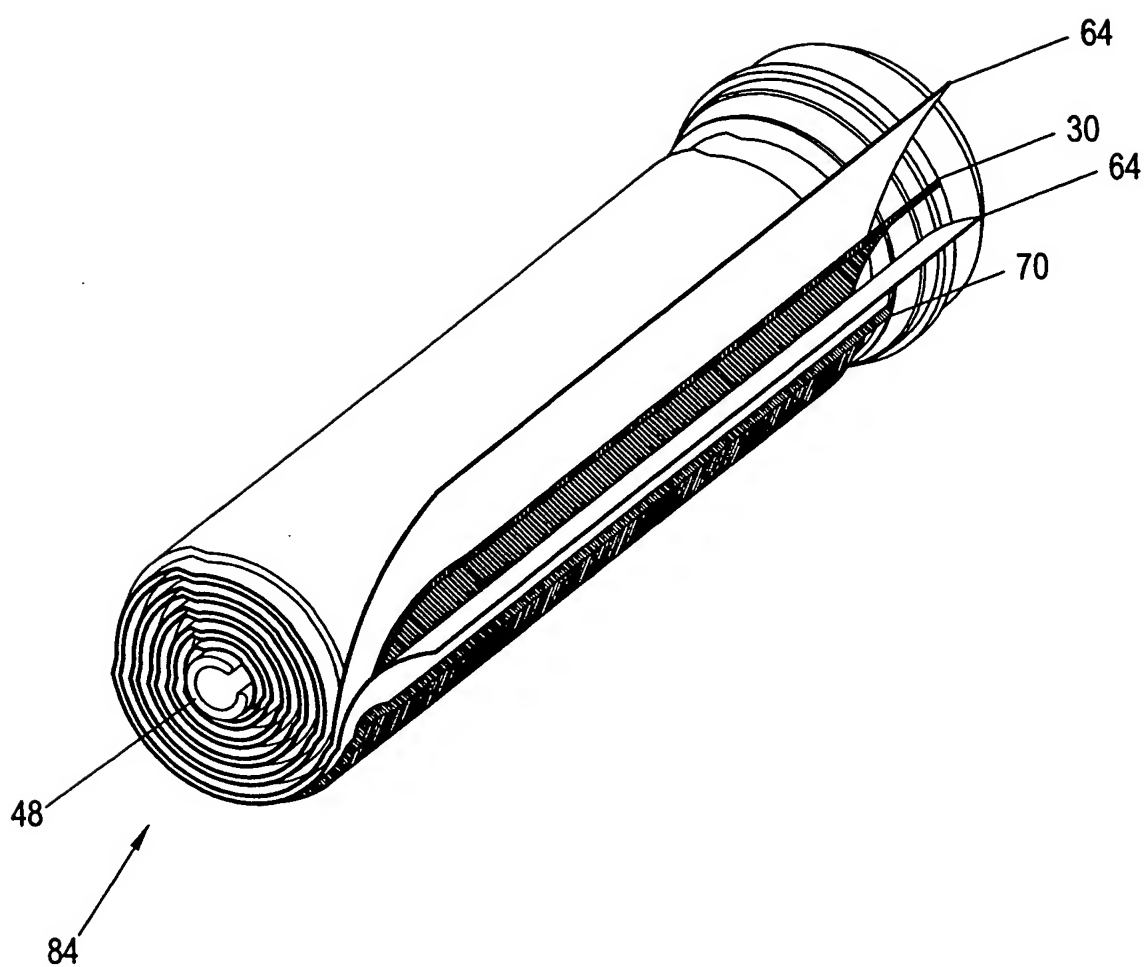




FIG. 16

8/11

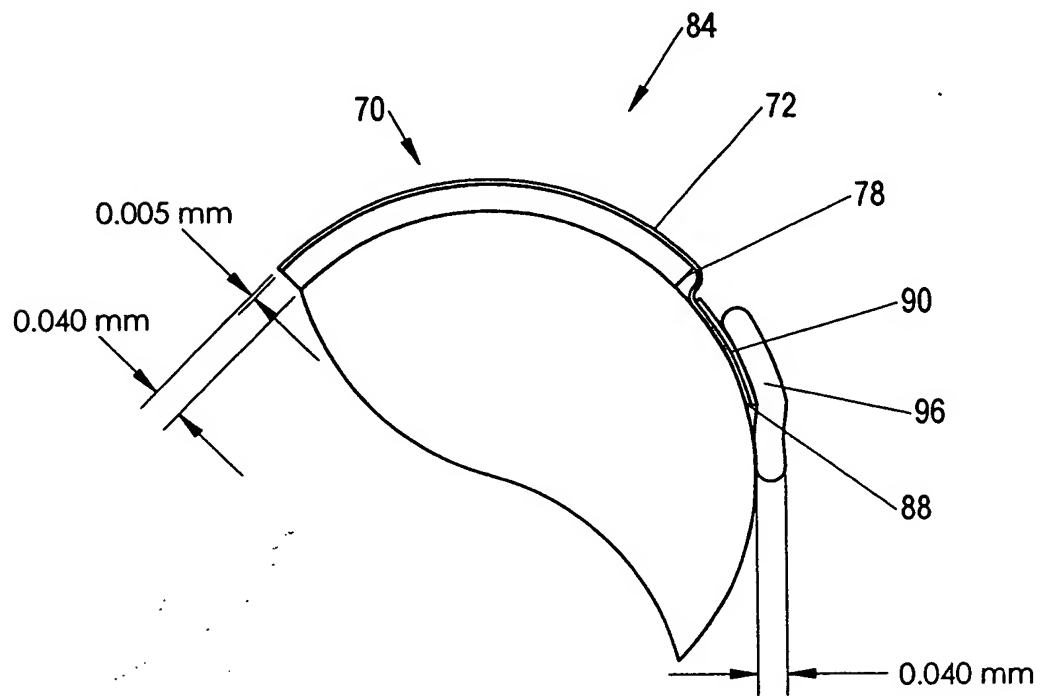

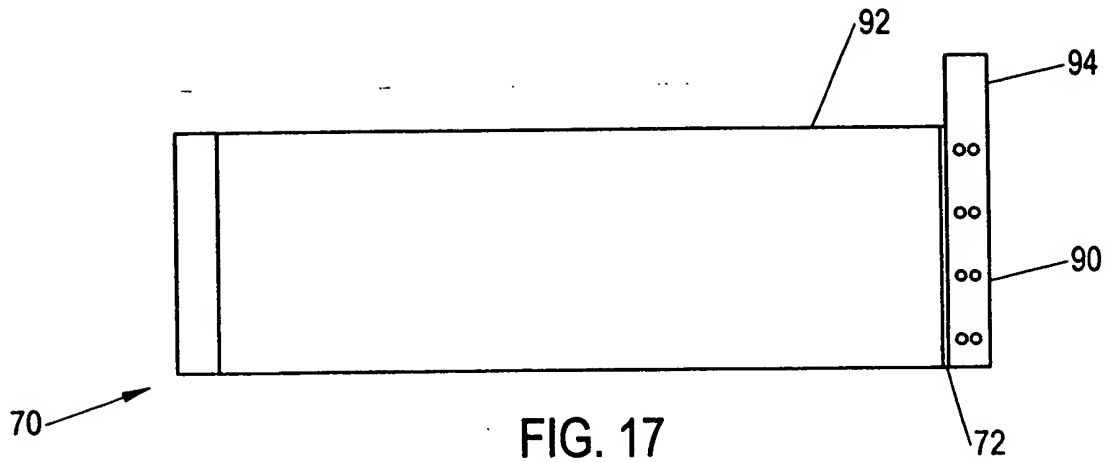

9/11

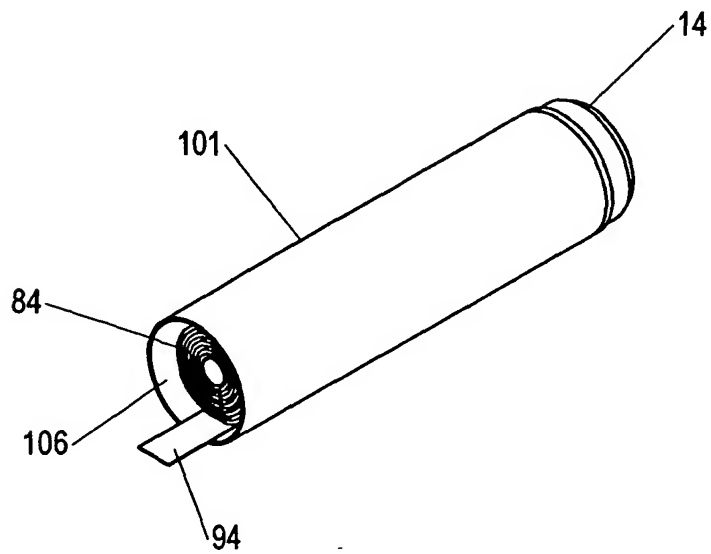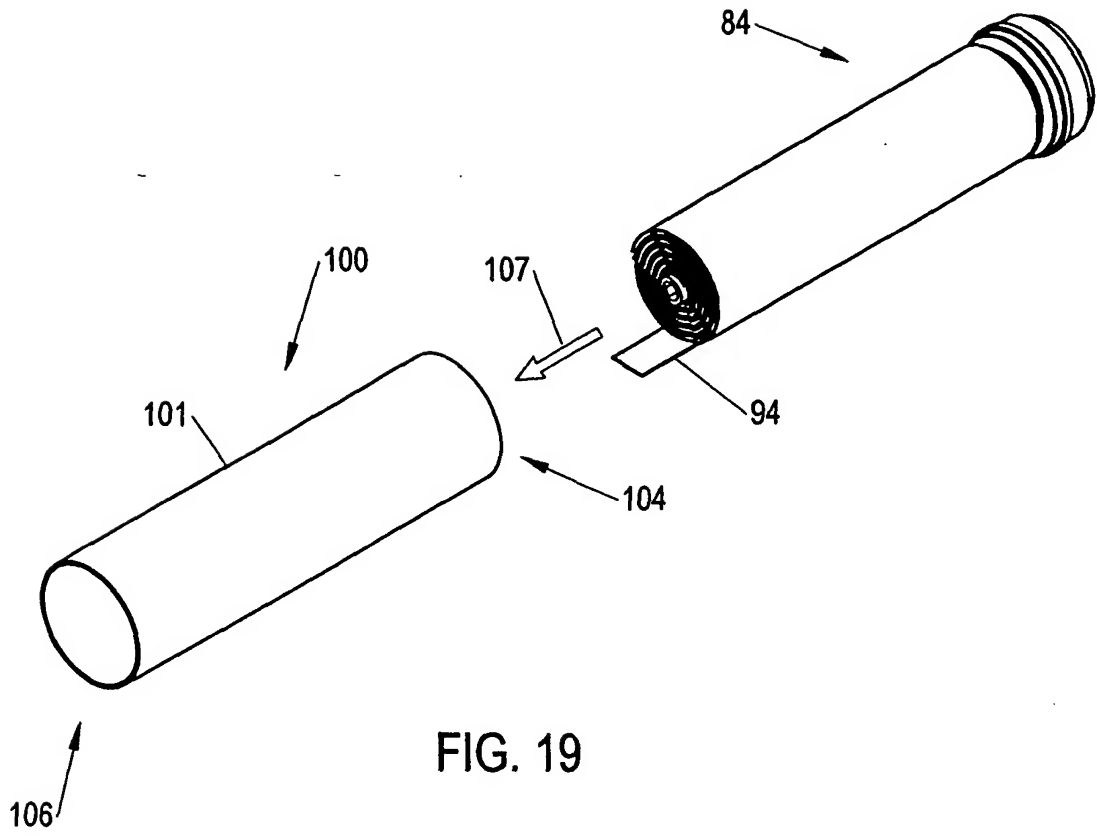

10/11

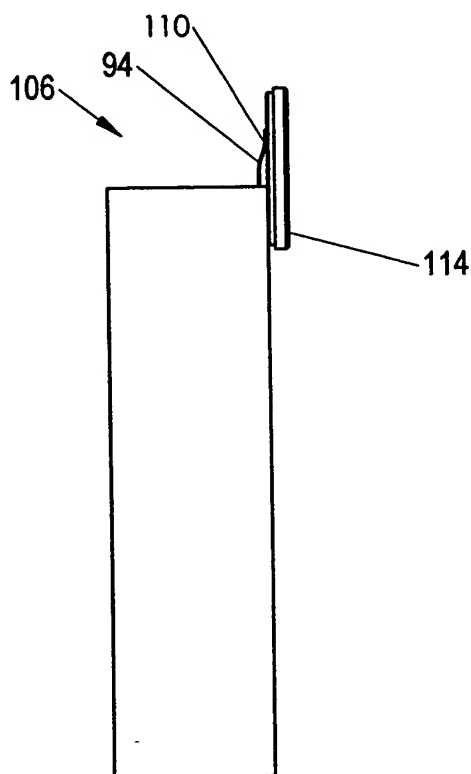
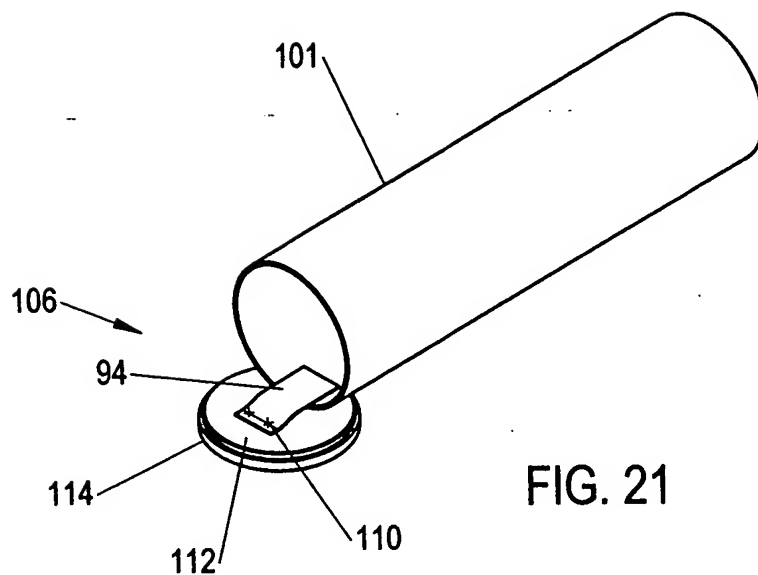


FIG. 22

Fig. 1 is a schematic diagram of a cross-section of a device. It shows a vertical rectangular block 100 with a circular feature 94 on its top surface. Inside the circle is a smaller circle 110 and a rectangular feature 111. A dashed circle 114 is also shown. To the left, a horizontal structure has two downward arrows labeled L and R, and an upward arrow labeled R/2.

FIG 24